Kodak KLIC-7006 Li-ION Battery

Effective: October 11, 2007

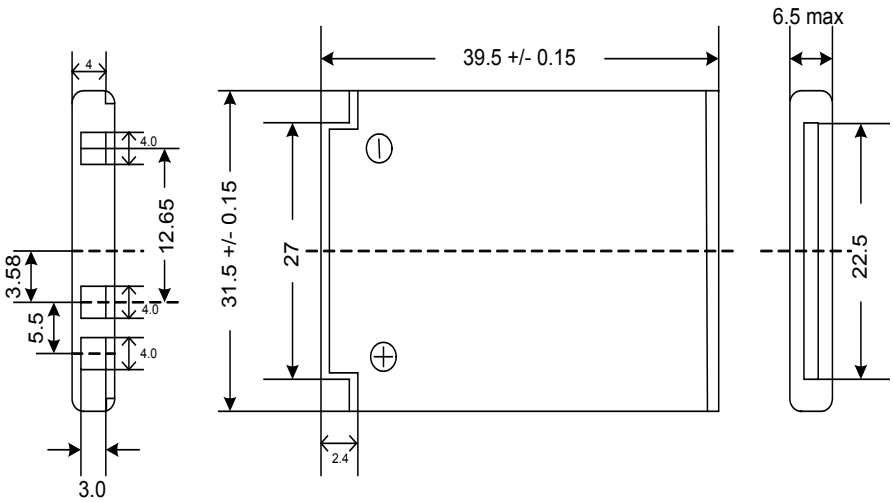

System:	**Li-ION**
Designation:	**KLIC-7006**
Nominal Voltage:	**3.7 Volts**
Nominal Capacity:	**740 mAh**
Minimum Capacity:	**710 mAh**
End Voltage:	**3.0 Volts**
Charging Current:	**770 mA**
Max. Charging Current:	**1065 mA**
Charging Voltage:	**4.2 +/- 1% VDC**
Standard Discharger Current:	**1050mA**
Max. Discharger Current:	**1420 mA**
Charging Cycles:	**Up to 300**
Internal Resistance:	**160 mOhm or less**
Temperature Ranges:	
Operating	**0°C to +45°C**
Storage	**-10°C to +45°C**
Charging Approx.	**0°C to +45°C**
Weight:	**14.8 grams**
Terminals:	**Flat Contacts**
Jacket:	**Plastic Housing, Film Label**

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact Eastman Kodak Company, 343 State Street, Rochester NY 14650-0811, Phone 1-800-242-2424 **www.kodak.com/go/batteries**

© Eastman Kodak Company, 2007 Kodak is a trademark.